

ORDINANCE NO. 15-25

AN ORDINANCE TO AWARD A BID FOR THE SCHWARTZ ROAD WEST RESURFACING PROJECT AND DECLARING AN EMERGENCY

WHEREAS, to address pavement maintenance conditions and to improve pedestrian access, it is necessary to repair and re-pave Schwartz Road west of Nagel Road, install a sidewalk along the west side of Nagel Road over Schwartz Creek, and perform temporary pavement repairs along Riegelsberger Road during the upcoming construction season to maintain safe travel conditions for businesses, residents, and the traveling public; and

WHEREAS, the City Engineer has identified a Schwartz Road West Resurfacing Project from Nagel Road to Jaycox Road which shall include the following: widening of the existing asphalt roadway from the average width of 20-feet to 26-feet to be striped to accommodate 11-foot-wide travel lanes and 2-foot-wide asphalt berms along both sides of the roadway; retaining the 3-lane curb & gutter section at the current asphalt pavement width of 33 feet where it previously existed; asphalt pavement planing; asphalt resurfacing with a 2-1/4 inch asphalt pavement; intersection improvements; partial & full depth pavement repairs; utility adjustments; curb ramp replacements; and pavement striping. The overall project will be approximately 2,900 feet in length, see Exhibit A attached hereto; and

WHEREAS, the sidewalk installation along the west side of Nagel Road over Schwartz Creek shall require shifting the roadway centerline easterly to provide adequate space for the new sidewalk and includes full depth pavement widening, pavement planing, asphalt roadway resurfacing, concrete sidewalk, aggregate berm along the west pavement edge, roadside guardrail on both sides of the roadway, and pavement striping; and

WHEREAS, the temporary pavement work on Rieglesberger Road shall be partial depth asphalt repairs at locations identified by the City Engineer and shall include the restriping of any pavement markings disturbed; and

WHEREAS, Avon City Council passed Resolution R-1-25 on January 6, 2025, which authorized the public bid of said Schwartz Road West Pavement Resurfacing Project; and

WHEREAS, the public bids were opened and read aloud at noon on January 30, 2025 at Avon City Hall, and the following bids were received:

Contractor	Bid Total
Specialized Construction, Inc.	\$ 678,130.50
Precision Paving, Inc.	\$ 762,928.75
Geauga Highway Co.	\$ 771,635.50
Barbicas Paving, LLC	\$ 781,246.00
Ronyak Paving, Inc.	\$ 795,777.00
Erie Blacktop Inc.	\$ 810,980.65
Crossroads Asphalt Recycling, Inc.	\$ 811,186.75
Karvo Companies, Inc.	\$ 877,312.33

WHEREAS, the Engineer's Estimated cost for the project was set at \$880,657.00. As such, the bid by Specialized Construction, Inc. is approximately 23% below the Engineer's Estimate. A copy of the bid tabulation, bid review memorandum, and other supporting documentation is attached hereto as Exhibit "B"; and

WHEREAS, the City Engineer has reviewed each of the Bids submitted and is recommending that the bids submitted by Specialized Construction, Inc. be considered the lowest and best bid for the Schwartz Road West Resurfacing Project; and

WHEREAS, Council finds that it is in the best interest of the health, safety, and welfare of the Community that the City go forward with the awarding of a construction contract based on the public bid submitted by the Specialized Construction, Inc. for the Schwartz Road West Resurfacing Project, which was received on January 30, 2025.

NOW, THEREFORE, BE IT ORDAINED BY THE COUNCIL OF THE CITY OF AVON, COUNTY OF LORAIN AND STATE OF OHIO:

Section 1 - That pursuant to public bids received on January 30, 2025, at Avon City Hall for the Schwartz Road West Resurfacing Project, the bid submitted by Specialized Construction, Inc. in the amount of **Six Hundred Seventy-Eight Thousand One Hundred Thirty and 50/100 Dollars (\$678,130.50)** for the Schwartz Road West Resurfacing Project is declared to be the lowest and best bid. (See Exhibits A & B attached hereto and incorporated herein by their reference.) The Mayor is hereby authorized to execute a construction contract with that entity. The Finance Director is hereby authorized to make pavement in said amount from the 2025 Road Program Fund No. 409. In addition, the Finance Director is authorized to increase this appropriation by a responsible amount for engineering and legal fees associated with this project.

Section 2- That it is found and determined that all formal actions of the Council of the City of Avon concerning and relating to the adoption of this Resolution were taken in an open meeting of the Council of the City of Avon and that all deliberations of this City's Council and any of its committees that resulted in those formal actions were in meetings open to the public, in compliance with all legal requirements, including Section 121.22 of the Ohio Revised Code.

Section 3- That this Ordinance is hereby declared to be an emergency measure immediately necessary for the preservation of the public health, safety, and welfare of the citizens of the City of Avon, the immediate emergency being the necessity to undertake and substantially complete the Schwartz Road West Resurfacing Project prior to the end of the 2025 construction season; therefore, this Ordinance shall be in full force and effect immediately upon its passage and approval by the Mayor.

PASSED: February 24, 2025 DATE SIGNED: February 24, 2025

By: Brian Fischer
Brian Fischer, Council President

DATE APPROVED BY THE MAYOR: February 25, 2025



Bryan K. Jensen, Mayor

APPROVED AS TO FORM:



John A. Gasior, Law Director

ATTEST:




Barbara Brooks, Clerk of Council

POSTED: February 26, 2025
Electronically and at City Hall as
Provided by Council

Prepared By:
John A. Gasior, Esq.
Law Director


I, Barbara J. Brooks, Clerk of the Council of the City of Avon, Ohio, hereby certify this document to be a true and exact copy of Ordinance No. 15-25, passed by the Council of said City on February 24, 2025.

IN WITNESS WHEREOF, I have on this 25th day of February 2025, affixed my signature and official seal.



Barbara J. Brooks, Clerk of the Council
of the City of Avon, Ohio

EXHIBIT A

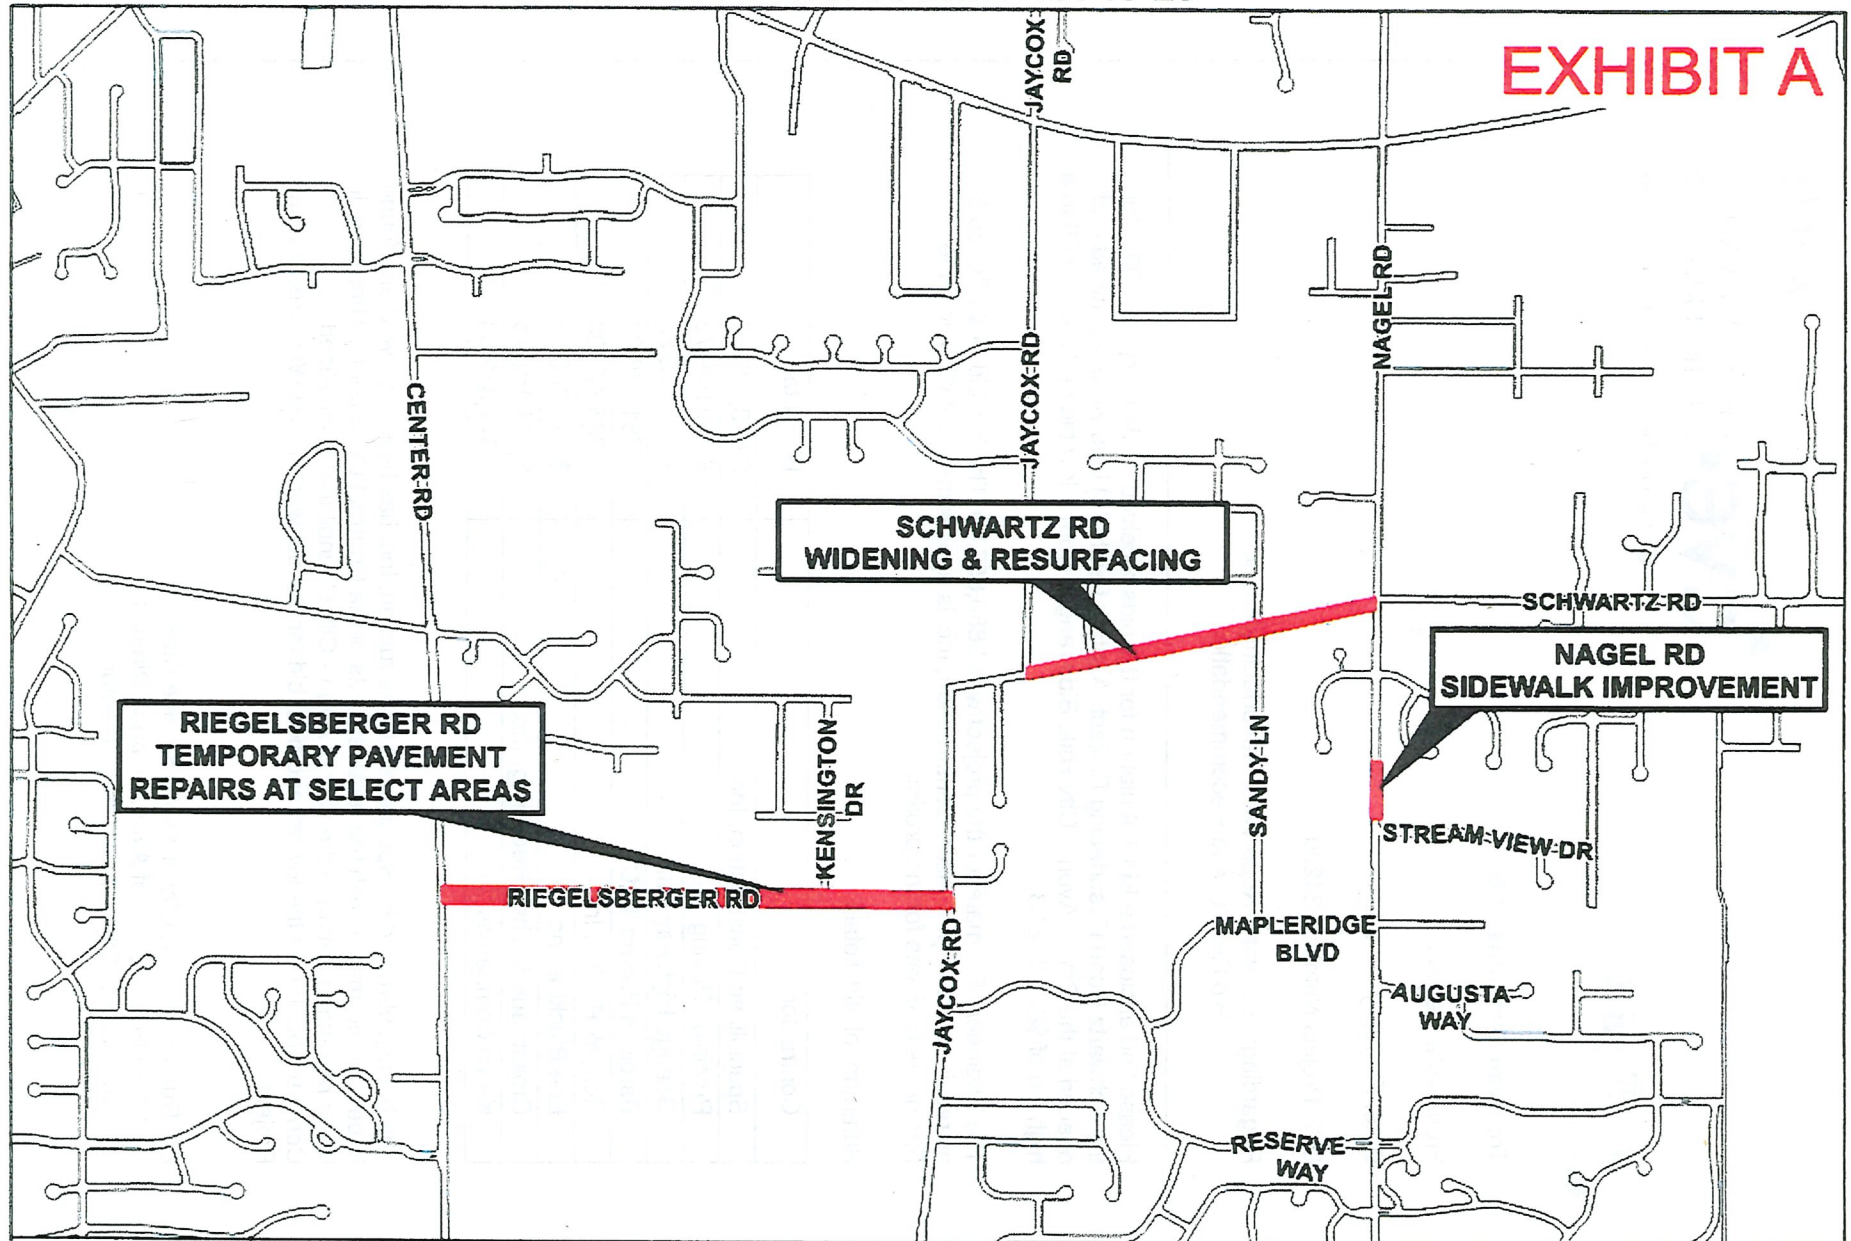

PROJECT NUMBER 24290 SHEET: TOTAL SHEETS:	 CHAGRIN VALLEY ENGINEERING, LTD.	Project Areas Included Within The SCHWARTZ ROAD RESURFACING PROJECT CITY OF AVON, LORAIN COUNTY, OH	 CITY OF AVON EST 1814	 NTS
---	---	---	--	--

Date: 12/30/2024

EXHIBIT B TO ORDINANCE NO. 15-25

EXHIBIT B



M E M O

To: **Ryan Cummins, P.E.**

From: John Lewins

Date: February 10, 2025

CVE Project Number: 24290

Regarding: Schwartz Road West Resurfacing Project
Bid Results and Recommendation

Please find enclosed a Bid Tabulation for the bids received on January 30, 2024, for the Schwartz Road Resurfacing Project. A total of eight (8) bids were submitted and opened at the City of Avon – City Hall. Bids ranged from a low bid of \$678,130.50 to a high bid of \$877,312.33.

The Engineers Estimate for the project was \$880,657.00. The low bid of \$678,130.50 as received from Specialized Construction, Inc. is approximately 23% below the Engineers Estimate for the project.

Summary of Bid Totals

Contractor	Bid Total
Specialized Construction, Inc.	\$ 678,130.50
Precision Paving, Inc.	\$ 762,928.75
Geauga Highway Co.	\$ 771,635.50
Barbicas Paving, LLC	\$ 781,246.00
Ronyak Paving, Inc.	\$ 795,777.00
Erie Blacktop Inc.	\$ 810,980.65
Crossroads Asphalt Recycling, Inc.	\$ 811,186.75
Karvo Companies, Inc.	\$ 877,312.33

The bid as submitted by Specialized Construction, Inc. has been reviewed and found to be in conformance with the requirements of the Contract Documents. Therefore, it is our recommendation to the City of Avon - City Council that Specialized Construction, Inc. is the lowest and best bid for the Schwartz Road West Resurfacing Project.

Cc: Duane Streator, City of Avon, Service Director
Steve Presley, City of Avon, Finance Director
John Gasior, City of Avon, Law Director

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				SPECIALIZED CONSTRUCTION INC.	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE	TOTAL
1	CONCRETE PAVEMENT REMOVED	SY	12	\$30.00	\$360.00
2	CONCRETE DRIVE REMOVED	SY	215	\$20.00	\$4,300.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$2.50	\$592.50
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$15.00	\$255.00
5	GUARDRAIL REMOVED	LF	26	\$1.00	\$26.00
6	EXCAVATION	CY	780	\$30.00	\$23,400.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.25	\$3,375.00
8	LINEAR GRADING	LF	3,650	\$3.00	\$10,950.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$22.00	\$44,880.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$35.00	\$10,850.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$2.00	\$7,620.00
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$60.00	\$12,600.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$4.00	\$31,800.00
14	UTILITY ACCESS DRIVE	SY	42	\$47.00	\$1,974.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$195.00	\$66,885.00
16	AGGREGATE BASE (304)	CY	421	\$75.00	\$31,575.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$2.00	\$17,980.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$260.00	\$107,120.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1,(448), PG 64-22 (LEVELING COURSE)	CY	206	\$250.00	\$51,500.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$117.00	\$13,923.00
21	GUARDRAIL, TYPE 5	LF	63	\$20.00	\$1,260.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$26.00	\$5,200.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,400.00	\$4,800.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$975.00	\$1,950.00
25	CONCRETE WALK	SF	612	\$15.00	\$9,180.00
26	CURB RAMP	SF	143	\$25.00	\$3,575.00
27	AREA DRAIN, OPTION C	EACH	1	\$2,050.00	\$2,050.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$1,200.00	\$1,200.00
29	MISCELLANEOUS METAL	LBS	1,000	\$0.50	\$500.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$44,000.00	\$44,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$85.00	\$8,500.00
32	SHOULDER PREPARATION	SY	84	\$80.00	\$6,720.00
33	COMPACTED AGGREGATE	CY	14	\$195.00	\$2,730.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$500.00	\$1,500.00
35	MOBILIZATION	LUMP	1	\$25,000.00	\$25,000.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$2,000.00	\$4,000.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$500.00	\$1,500.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$14,750.00	\$14,750.00
39	TOPSOIL	CY	170	\$75.00	\$12,750.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$250.00	\$5,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$678,130.50
				DAYS TO COMPLETE 60	
				EARLIEST STARTING DATE: 4-14-25	

Note: The unit price in words (\$1.95) was different than the numeric unit price (\$195.00). This is considered to be a scrivener's error and the numeric unit price was used in the official bid amount tabulation.

&&& Note: The unit price in words shown in the bid (\$2,050.00) was different than the numeric unit price provided (\$2,250.00). The unit bid price in words was used in the official bid amount tabulation.

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				PRECISION PAVING, INC.	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$32.00	\$384.00
2	CONCRETE DRIVE REMOVED	SY	215	\$32.00	\$6,880.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$3.25	\$770.25
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$16.00	\$272.00
5	GUARDRAIL REMOVED	LF	26	\$1.00	\$26.00
6	EXCAVATION	CY	780	\$65.00	\$50,700.00
7	SUBGRADE COMPACTION	SY	2,700	\$3.00	\$8,100.00
8	LINEAR GRADING	LF	3,650	\$3.20	\$11,680.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$35.00	\$71,400.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$40.00	\$12,400.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$3.25	\$12,382.50
12	FULL DEPTH ASPHALT PAVEMENT REPAIR	SY	210	\$80.00	\$16,800.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$3.50	\$27,825.00
14	UTILITY ACCESS DRIVE	SY	42	\$55.00	\$2,310.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$230.00	\$78,890.00
16	AGGREGATE BASE (304)	CY	421	\$110.00	\$46,310.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$3.00	\$26,970.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$265.00	\$109,180.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG 64-22 (LEVELING COURSE)	CY	206	\$230.00	\$47,380.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$105.00	\$12,495.00
21	GUARDRAIL, TYPE 5	LF	63	\$21.00	\$1,323.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$28.00	\$5,600.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,600.00	\$5,200.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$1,100.00	\$2,200.00
25	CONCRETE WALK	SF	612	\$17.00	\$10,404.00
26	CURB RAMP	SF	143	\$17.00	\$2,431.00
27	AREA DRAIN, OPTION C	EACH	1	\$2,500.00	\$2,500.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$750.00	\$750.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.50	\$2,500.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$30,000.00	\$30,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$85.00	\$8,500.00
32	SHOULDER PREPARATION	SY	84	\$19.00	\$1,596.00
33	COMPACTED AGGREGATE	CY	14	\$145.00	\$2,030.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$1,100.00	\$3,300.00
35	MOBILIZATION	LUMP	1	\$10,500.00	\$10,500.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$4,000.00	\$8,000.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$1,100.00	\$3,300.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$15,000.00	\$15,000.00
39	TOPSOIL	CY	170	\$92.00	\$15,640.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$450.00	\$9,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$762,928.75
				DAYS TO COMPLETE: 60 Days	
				EARLIEST STARTING DATE May 1st, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				BARBICAS PAVING, LLC	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$20.00	\$240.00
2	CONCRETE DRIVE REMOVED	SY	215	\$20.00	\$4,300.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$5.00	\$1,185.00
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$10.00	\$170.00
5	GUARDRAIL REMOVED	LF	26	\$1.00	\$26.00
6	EXCAVATION	CY	780	\$40.00	\$31,200.00
7	SUBGRADE COMPACTION	SY	2,700	\$0.50	\$1,350.00
8	LINEAR GRADING	LF	3,650	\$2.00	\$7,300.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$30.00	\$61,200.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$25.00	\$7,750.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$1.00	\$3,810.00
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$150.00	\$31,500.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$6.00	\$47,700.00
14	UTILITY ACCESS DRIVE	SY	42	\$20.00	\$840.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$225.00	\$77,175.00
16	AGGREGATE BASE (304)	CY	421	\$100.00	\$42,100.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$3.00	\$26,970.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$300.00	\$123,600.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG 64-22 (LEVELING COURSE)	CY	206	\$300.00	\$61,800.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$175.00	\$20,825.00
21	GUARDRAIL, TYPE 5	LF	63	\$20.00	\$1,260.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$26.00	\$5,200.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,400.00	\$4,800.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$975.00	\$1,950.00
25	CONCRETE WALK	SF	612	\$10.00	\$6,120.00
26	CURB RAMP	SF	143	\$55.00	\$7,865.00
27	AREA DRAIN, OPTION C	EACH	1	\$800.00	\$800.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$250.00	\$250.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.00	\$2,000.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$55,000.00	\$55,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$80.00	\$8,000.00
32	SHOULDER PREPARATION	SY	84	\$15.00	\$1,260.00
33	COMPACTED AGGREGATE	CY	14	\$150.00	\$2,100.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$550.00	\$1,650.00
35	MOBILIZATION	LUMP	1	\$18,000.00	\$18,000.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$2,200.00	\$4,400.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$150.00	\$450.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$12,500.00	\$12,500.00
39	TOPSOIL	CY	170	\$80.00	\$13,600.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$150.00	\$3,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$781,246.00
				DAYS TO COMPLETE 60 days	
				EARLIEST STARTING DATE April 14, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				GEAUGA HIGHWAY CO.	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$20.00	\$240.00
2	CONCRETE DRIVE REMOVED	SY	215	\$15.00	\$3,225.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$10.00	\$2,370.00
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$20.00	\$340.00
5	GUARDRAIL REMOVED	LF	26	\$12.00	\$312.00
6	EXCAVATION	CY	780	\$52.00	\$40,560.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.75	\$4,725.00
8	LINEAR GRADING	LF	3,650	\$3.00	\$10,950.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$30.00	\$61,200.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$40.00	\$12,400.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$3.50	\$13,335.00
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$80.00	\$16,800.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$2.50	\$19,875.00
14	UTILITY ACCESS DRIVE	SY	42	\$100.00	\$4,200.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$214.00	\$73,402.00
16	AGGREGATE BASE (304)	CY	421	\$106.00	\$44,626.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$2.10	\$18,879.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$221.00	\$91,052.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG 64-22 (LEVELING COURSE)	CY	206	\$215.00	\$44,290.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$130.00	\$15,470.00
21	GUARDRAIL, TYPE 5	LF	63	\$25.00	\$1,575.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$31.50	\$6,300.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,685.00	\$5,370.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$1,450.00	\$2,900.00
25	CONCRETE WALK	SF	612	\$12.00	\$7,344.00
26	CURB RAMP	SF	143	\$16.50	\$2,359.50
27	AREA DRAIN, OPTION C	EACH	1	\$1,000.00	\$1,000.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$450.00	\$450.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.50	\$2,500.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$71,000.00	\$71,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$75.00	\$7,500.00
32	SHOULDER PREPARATION	SY	84	\$4.00	\$336.00
33	COMPACTED AGGREGATE	CY	14	\$150.00	\$2,100.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$600.00	\$1,800.00
35	MOBILIZATION	LUMP	1	\$70,000.00	\$70,000.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$1,500.00	\$3,000.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$600.00	\$1,800.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$10,000.00	\$10,000.00
39	TOPSOIL	CY	170	\$65.00	\$11,050.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$250.00	\$5,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$771,635.50
				DAYS TO COMPLETE 87 Days	
				EARLIEST STARTING DATE April 7, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				RONYAK PAVING INC	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$40.00	\$480.00
2	CONCRETE DRIVE REMOVED	SY	215	\$20.00	\$4,300.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$4.00	\$948.00
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$25.00	\$425.00
5	GUARDRAIL REMOVED	LF	26	\$2.00	\$52.00
6	EXCAVATION	CY	780	\$45.00	\$35,100.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.00	\$2,700.00
8	LINEAR GRADING	LF	3,650	\$3.00	\$10,950.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$35.00	\$71,400.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$40.00	\$12,400.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$0.30	\$1,143.00
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$110.00	\$23,100.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$4.00	\$31,800.00
14	UTILITY ACCESS DRIVE	SY	42	\$75.00	\$3,150.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$210.00	\$72,030.00
16	AGGREGATE BASE (304)	CY	421	\$85.00	\$35,785.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$2.00	\$17,980.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$240.00	\$98,880.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG 64-22 (LEVELING COURSE)	CY	206	\$260.00	\$53,560.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$145.00	\$17,255.00
21	GUARDRAIL, TYPE 5	LF	63	\$30.00	\$1,890.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$35.00	\$7,000.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$3,225.00	\$6,450.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$1,325.00	\$2,650.00
25	CONCRETE WALK	SF	612	\$12.00	\$7,344.00
26	CURB RAMP	SF	143	\$30.00	\$4,290.00
27	AREA DRAIN, OPTION C	EACH	1	\$1,175.00	\$1,175.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$500.00	\$500.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.00	\$2,000.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$64,175.00	\$64,175.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$85.00	\$8,500.00
32	SHOULDER PREPARATION	SY	84	\$10.00	\$840.00
33	COMPACTED AGGREGATE	CY	14	\$125.00	\$1,750.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$1,100.00	\$3,300.00
35	MOBILIZATION	LUMP	1	\$75,000.00	\$75,000.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$500.00	\$1,000.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$775.00	\$2,325.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$17,750.00	\$17,750.00
39	TOPSOIL	CY	170	\$60.00	\$10,200.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$210.00	\$4,200.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$795,777.00
				DAYS TO COMPLETE 90 Days	
				EARLIEST STARTING DATE: May 1, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Aven

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				ERIE BLACKTOP INC.	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$31.50	\$378.00
2	CONCRETE DRIVE REMOVED	SY	215	\$31.50	\$6,772.50
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$3.15	\$746.55
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$15.75	\$267.75
5	GUARDRAIL REMOVED	LF	26	\$7.85	\$204.10
6	EXCAVATION	CY	780	\$46.00	\$35,880.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.35	\$3,645.00
8	LINEAR GRADING	LF	3,650	\$2.35	\$8,577.50
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$30.00	\$61,200.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$35.50	\$11,005.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$3.15	\$12,001.50
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$100.00	\$21,000.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$2.95	\$23,452.50
14	UTILITY ACCESS DRIVE	SY	42	\$61.75	\$2,593.50
15	ASPHALT CONCRETE BASE (301)	CY	343	\$265.00	\$90,895.00
16	AGGREGATE BASE (304)	CY	421	\$128.00	\$53,888.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$3.20	\$28,768.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$245.00	\$100,940.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1,(448), PG 64-22 (LEVELING COURSE)	CY	208	\$265.00	\$54,590.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$102.00	\$12,138.00
21	GUARDRAIL, TYPE 5	LF	63	\$26.25	\$1,653.75
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$31.25	\$6,250.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,750.00	\$5,500.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$1,450.00	\$2,900.00
25	CONCRETE WALK	SF	612	\$17.00	\$10,404.00
26	CURB RAMP	SF	143	\$17.00	\$2,431.00
27	AREA DRAIN, OPTION C	EACH	1	\$2,520.00	\$2,520.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$735.00	\$735.00
29	MISCELLANEOUS METAL	LBS	1,000	\$3.25	\$3,250.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$95,000.00	\$95,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$90.00	\$9,000.00
32	SHOULDER PREPARATION	SY	84	\$15.50	\$1,302.00
33	COMPACTED AGGREGATE	CY	14	\$168.00	\$2,352.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$1,050.00	\$3,150.00
35	MOBILIZATION	LUMP	1	\$8,500.00	\$8,500.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$2,420.00	\$4,840.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$1,050.00	\$3,150.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$16,000.00	\$16,000.00
39	TOPSOIL	CY	170	\$110.00	\$18,700.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$220.00	\$4,400.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$810,980.65
				DAYS TO COMPLETE: 50 Days	
				EARLIEST STARTING DATE April 28, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				CROSSROADS ASPHALT RECYCLING, INC.	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$155.00	\$1,860.00
2	CONCRETE DRIVE REMOVED	SY	215	\$31.50	\$6,772.50
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$5.00	\$1,185.00
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$50.00	\$850.00
5	GUARDRAIL REMOVED	LF	26	\$10.00	\$260.00
6	EXCAVATION	CY	780	\$95.50	\$74,490.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.50	\$4,050.00
8	LINEAR GRADING	LF	3,650	\$1.50	\$5,475.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$28.00	\$57,120.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$45.00	\$13,950.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$1.55	\$5,905.50
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$71.00	\$14,910.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$3.50	\$27,825.00
14	UTILITY ACCESS DRIVE	SY	42	\$105.00	\$4,410.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$200.00	\$68,600.00
16	AGGREGATE BASE (304)	CY	421	\$115.00	\$48,415.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$2.15	\$19,328.50
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$250.00	\$103,000.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG 64-22 (LEVELING COURSE)	CY	206	\$265.00	\$54,590.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$213.00	\$25,347.00
21	GUARDRAIL, TYPE 5	LF	63	\$25.00	\$1,575.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$32.00	\$6,400.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,685.00	\$5,370.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$1,450.00	\$2,900.00
25	CONCRETE WALK	SF	612	\$9.00	\$5,508.00
26	CURB RAMP	SF	143	\$33.00	\$4,719.00
27	AREA DRAIN, OPTION C	EACH	1	\$2,100.00	\$2,100.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$900.00	\$900.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.25	\$2,250.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$60,000.00	\$60,000.00
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$85.00	\$8,500.00
32	SHOULDER PREPARATION	SY	84	\$12.50	\$1,050.00
33	COMPACTED AGGREGATE	CY	14	\$120.00	\$1,680.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$475.00	\$1,425.00
35	MOBILIZATION	LUMP	1	\$43,566.25	\$43,566.25
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$100.00	\$200.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$450.00	\$1,350.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$25,000.00	\$25,000.00
39	TOPSOIL	CY	170	\$55.00	\$9,350.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$450.00	\$9,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$811,186.75
				DAYS TO COMPLETE 75 Days	
				EARLIEST STARTING DATE May 5, 2025	

BID TABULATION

PROJECT NAME: SCHWARTZ ROAD WEST RESURFACING (JAYCOX ROAD TO NAGEL ROAD)

PROJECT LOCATION: City Of Avon

DATE: JANUARY 30, 2025

CVE JOB NO. 24290

				KARVO COMPANIES, INC	
ITEM	DESCRIPTION	UNIT	QTY.	UNIT PRICE BASED ON WRITTEN WORDS	TOTAL PRICE BASED ON WRITTEN WORDS
1	CONCRETE PAVEMENT REMOVED	SY	12	\$75.00	\$900.00
2	CONCRETE DRIVE REMOVED	SY	215	\$50.00	\$10,750.00
3	CONCRETE CURB RAMP/WALK REMOVED	SF	237	\$15.00	\$3,555.00
4	CONCRETE CURB AND GUTTER REMOVED	LF	17	\$75.00	\$1,275.00
5	GUARDRAIL REMOVED	LF	26	\$1.00	\$26.00
6	EXCAVATION	CY	780	\$60.00	\$46,800.00
7	SUBGRADE COMPACTION	SY	2,700	\$1.00	\$2,700.00
8	LINEAR GRADING	LF	3,650	\$2.00	\$7,300.00
9	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 1	SY	2,040	\$32.00	\$65,280.00
10	PARTIAL DEPTH ASPHALT PAVEMENT REPAIR, TYPE 2	SY	310	\$35.00	\$10,850.00
11	FULL DEPTH PAVEMENT SAWING	LF	3,810	\$1.00	\$3,810.00
12	FULL DEPTH ASPHLT PAVEMENT REPAIR	SY	210	\$125.00	\$26,250.00
13	PAVEMENT PLANING, ASPHALT CONCRETE	SY	7,950	\$4.80	\$38,160.00
14	UTILITY ACCESS DRIVE	SY	42	\$25.00	\$1,050.00
15	ASPHALT CONCRETE BASE (301)	CY	343	\$300.00	\$102,900.00
16	AGGREGATE BASE (304)	CY	421	\$125.00	\$52,625.00
17	SINGLE CHIP SEAL, TYPE A (442)	SY	8,990	\$2.80	\$25,172.00
18	1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22	CY	412	\$260.00	\$107,120.00
19	3/4" AVERAGE ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1,(448), PG 64-22 (LEVELING COURSE)	CY	206	\$290.00	\$59,740.00
20	6" REINFORCE CONCRETE PAVEMENT, CLASS QC MS, DRIVE APRON	SY	119	\$100.00	\$11,900.00
21	GUARDRAIL, TYPE 5	LF	63	\$20.00	\$1,260.00
22	GUARDRAIL, TYPE 5 LONG SPAN	LF	200	\$26.00	\$5,200.00
23	ANCHOR ASSEMBLY, TYPE E	EACH	2	\$2,400.00	\$4,800.00
24	ANCHOR ASSEMBLY, MGS TYPE T	EACH	2	\$975.00	\$1,950.00
25	CONCRETE WALK	SF	612	\$20.00	\$12,240.00
26	CURB RAMP	SF	143	\$25.00	\$3,575.00
27	AREA DRAIN, OPTION C	EACH	1	\$15,000.00	\$15,000.00
28	YARD DRAIN ADJUSTED TO GRADE	EACH	1	\$12,500.00	\$12,500.00
29	MISCELLANEOUS METAL	LBS	1,000	\$2.00	\$2,000.00
30	MAINTENANCE OF TRAFFIC	LUMP	1	\$54,124.33	\$54,124.33
31	LAW ENFORCEMENT OFFICER WITH PATROL CAR	HOURS	100	\$100.00	\$10,000.00
32	SHOULDER PREPARATION	SY	84	\$25.00	\$2,100.00
33	COMPACTED AGGREGATE	CY	14	\$225.00	\$3,150.00
34	MONUMENT BOX ADJUSTED TO GRADE	EACH	3	\$1,000.00	\$3,000.00
35	MOBILIZATION	LUMP	1	\$50,000.00	\$50,000.00
36	REMOVE, SALVAGE, AND REINSTALL SOLAR POWERED SIGNAGE AND ASSEMBLY	EACH	2	\$1,500.00	\$3,000.00
37	VALVE BOX ADJUSTED TO GRADE	EACH	3	\$1,000.00	\$3,000.00
38	PAVEMENT MARKINGS AND TRAFFIC SIGNAGE	LUMP	1	\$15,000.00	\$15,000.00
39	TOPSOIL	CY	170	\$125.00	\$21,250.00
40	MAILBOX SUPPORT SYSTEM	EACH	20	\$300.00	\$6,000.00
41	GENERAL CONSTRUCTION CONTINGENCY ALLOWANCE	LUMP	1	\$80,000.00	\$80,000.00
TOTAL PROJECT COST				TOTAL	\$887,312.33
				DAYS TO COMPLETE 30 days	
				EARLIEST STARTING DATE May 1st 2025	

BIDDER'S CHECKLIST

Schwartz Road West Resurfacing Project (24290)
(3 Low Bidders)

Bid Opening Date – January 30, 2025

Avon, Ohio

Bid Components	Specialized Construction, Inc.	Precision Paving, Inc.	Geauga Highway Co.
Proposal - Completed and Signed	Yes	Yes	Yes
Bid Bond or Check - Submitted with Bid	Yes – Bid Bond	Yes – Bid Bond	Yes – Bid Bond
Bidder's Qualification Statement – Completed with Bid	Yes	Yes	Yes
Personal Property Tax Statement – Complete with Bid	Yes	Yes	Yes
Non-Collusion Affidavit – Completed with Bid	Yes	Yes	Yes
Certifications for Finding of Recovery – Complete with Bid	Yes	Yes	Yes
Verification of Bid Total	Yes (Amended Total)	Yes	Yes



Office of Auditor of State
88 East Broad Street
Post Office Box 1140
Columbus, OH 43216-1140

Auditor of State - Unresolved Findings for Recovery Certified Search

(614) 466-4514
(800) 282-0370

I have searched The Auditor of State's unresolved findings for recovery database using the following criteria:

Contractor's Information:

Name: **Hall, Brian**
Organization: **Specialized Construction, Inc.**
Date: **1/30/2025 3:53:20 PM**

This search produced the following list of **15** possible matches:

Name/Organization	Address
Hall, Kimberly	771 Kiowa Trail
Adams, Brian	65 E. Wilson Bridge Road
Adams, Brian	1940 Smoky Meadow Drive
Adams, Brian	65 E. Wilson Bridge Road
Adams, Brian	65 E. Wilson Bridge Road, Suite 200
Adams, Brian	65 E. Wilson Road
Adams, Brian	66 E. Wilson Bridge Road, Suite 200
Stump, Brian	1340 Converse Road
Bocook, Bridgett	267 W. 13th St.
Columbia Prospect LLC	3681 Green Road, Suite 419
Lee-Hall, Michelle	555 Brunswick Drive
Marshall, Wendy	2549 Hard Road
Speakman	
Speakman, Ron	277 S. Bennett Ave.
Speakman, Ronald	277 S. Bennett Ave.

The above list represents possible matches for the search criteria you entered. Please note that pursuant to ORC 9.24, only the person (which includes an organization) actually named in the finding for recovery is prohibited from being awarded a contract.

If the person you are searching for appears on this list, it means that the person has one or more findings for recovery and is prohibited from being awarded a contract described in ORC 9.24, unless one of the exceptions in that section apply.

If the person you are searching for does not appear on this list, an initialed copy of this page can serve as documentation of your compliance with ORC 9.24(E).

Please note that pursuant to ORC 9.24, it is the responsibility of the public office to verify that a person to whom it plans to award a contract does not appear in the Auditor of State's database. The Auditor of State's office is not responsible for inaccurate search results caused by user error or other circumstances beyond the Auditor of State's control.